

Aura develops and supplies Long Life light sources and solutions with a clear environmental and sustainable focus. With a lifetime that is up to four times longer than standard products, maintenance costs and environmental impact are cut by 75 percent. Our energy-saving lighting solutions can lower your energy consumption by up to 80 percent, depending on your existing equipment. Aura helps you to reduce your costs and carbon footprint.



# Ilex

WITH AURA T5 ECO SAVER LONG LIFE

A surface-mounted Eco luminaire for office areas




Ilex is a surface-mounted luminaire for the lighting of offices, classrooms, etc. It has a housing in lacquered steel with ABS VO endcaps.


Ilex has been specially designed for high visual comfort in the working place. Its high efficiency double parabolic louvres made of bright or satin aluminium have been customized for low luminance. Complying with EN 12464-1.

**Offices**  
**Public/private buildings**



Ilex 1x25W, LOR: 62 %

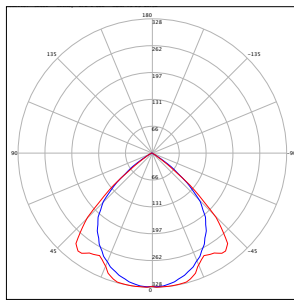

Ilex 2x25W, LOR: 65 %

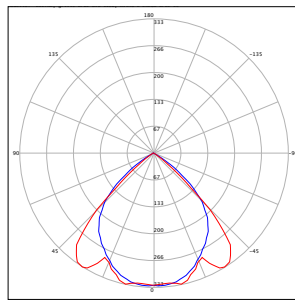

Ilex 4x13W, LOR: 66 %

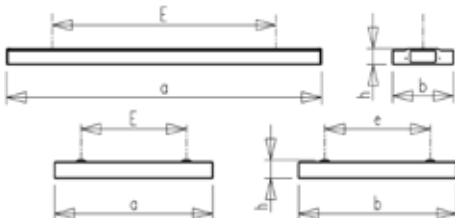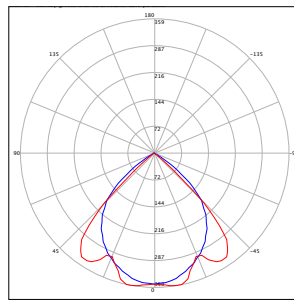

	a	b	E	e	h
1x25/50 W	1195	146	850		58
1x32/45/73 W	1495	146	850		58
2x25/50 W	1195	231	850		58
2x32/45/73 W	1495	231	850		58
4x13 W	600	600	400	400	65

Ilex will make you save up to 61 % energy compared with a standard T8 installation.

Depending on the luminous flux and energy saving requested, this Aura luminaire can efficiently substitute T8 installations thanks to its high efficiency reflector:

2 x 58 W => 1 x 73 W or 4 x 13 W

2 x 36 W => 1 x 45 W or 1 x 32 W



**T5 / G5**

**CL1**

**IK03**

**IP20**

**850°C**

**230V, 50-60Hz**

**Class A2 ballast**



## Installation

Easy to install thanks to its 3-pole "push-in" terminal block.  
Cable entry from the top or the endcap.

## Accessories

- The luminaire is delivered with current-controlled ballast which ensures maximum energy saving.
- Power-controlled electronic ballast is optional for maximum light output.
- Dimmable ballast and cable & plug for dimming are optional in combination with control gear.
- Suspension kit with 2 wires in Y shape is optional.
- Direct-indirect light distribution available on demand (4x13 W excluded).
- In-line installation kits 25 W or 32 W are optional.

## Lamp specification

We supply the luminaire in combination with T5 Eco Saver Long Life tubes with 58 000 h service life based on a 12 h operation cycle (10 % mortality):

- 1x25 W - 1x32 W - 1x45 W - 1x50 W- 1x73 W
- 2x25 W - 2x32 W - 2x45 W - 2x50 W- 2x73 W
- 4x13 W

## Available options:

PROGRAMME	ART. NUMBER	LAMPS	LOR	LOUVRES	DIMENSIONS (mm)	WEIGHT (kg)
	81211130	1x25 W	0.62	bright	1195x146x58	1.92
81211170	1x50 W	0.62	bright	1195x146x58	1.92	
81211150	1x32 W	0.62	bright	1495x146x58	2.49	
81211180	1x45 W	0.62	bright	1495x146x58	2.49	
81211190	1x73 W	0.62	bright	1495x146x58	2.49	
81221230	2x25 W	0.65	bright	1195x231x58	2.92	
81221270	2x50 W	0.65	bright	1195x231x58	2.92	
81221250	2x32 W	0.65	bright	1495x231x58	3.49	
81221280	2x45 W	0.65	bright	1495x231x58	3.49	
81221290	2x73 W	0.65	bright	1495x231x58	3.49	
81210130	1x25 W	0.62	satin	1195x146x58	1.92	
81210170	1x50 W	0.62	satin	1195x146x58	1.92	
81210150	1x32 W	0.62	satin	1495x146x58	2.49	
81210180	1x45 W	0.62	satin	1495x146x58	2.49	
81210190	1x73 W	0.62	satin	1495x146x58	2.49	
81220230	2x25 W	0.60	satin	1195x231x58	2.92	
81220270	2x50 W	0.60	satin	1195x231x58	2.92	
81220250	2x32 W	0.60	satin	1495x231x58	3.49	
81220280	2x45 W	0.60	satin	1495x231x58	3.49	
81220290	2x73 W	0.60	satin	1495x231x58	3.49	
81241810	4x13 W	0.62	satin	600x600x65	4.10	
81240810	4x13 W	0.66	bright	600x600x65	4.10	

Electronic ballast included, lamps have to be ordered separately.



© atmosphere - Fotolia.com, p.1 - © auremar - Fotolia.com

Pictures for illustration purposes only

AURAEN06-110

Printed on recycled paper

**AURA**  
THE ORIGINAL LONG LIFE LIGHT

Aura S.r.l., Viale Roma 9a, 40024 Castel San Pietro Terme, Italia  
Tel: +39 (0)51 94 81 50, Fax: +39 (0)51 94 16 31, info@auralight.it, www.auralight.it